


# Solution to Assignment 2

## Problem 1


(a) The impulse response of the matched filter is

$$h(t) = s(T-t)$$

The  $s(t)$  and  $h(t)$  are shown below:

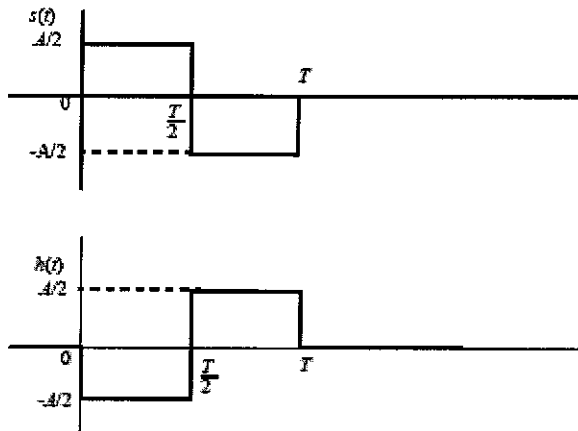


(b) The corresponding output of the matched filter is obtained by convolving  $h(t)$  with  $s(t)$ . The result is shown below:

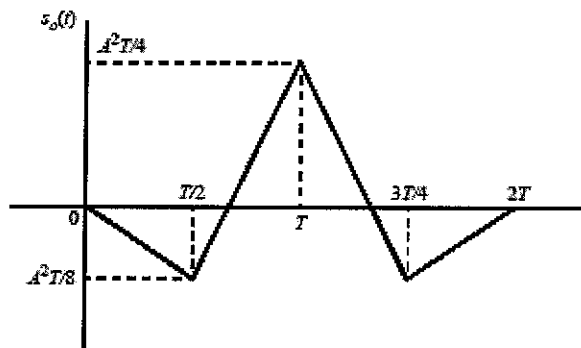

(c) The peak value of the filter output is equal to  $A^2T/4$ , occurring at  $t = T$ .

The output of the low-pass RC filter, produced by a rectangular pulse of amplitude  $A$  and duration  $T$ , is as shown below:

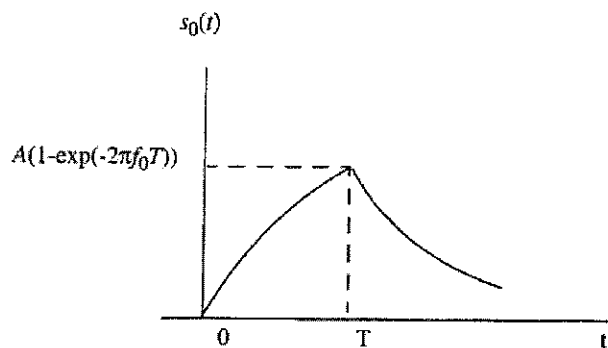

The peak value of the output pulse power is

$$P_{\text{out}} = A^2 [1 - \exp(-2\pi f_0 T)]^2$$

where  $f_0$  is the 3-dB cutoff frequency of the RC filter.

The average output noise power is

$$N_{\text{out}} = \frac{N_0}{2} \int_{-\infty}^{\infty} \frac{df}{1 + (f/f_0)^2}$$
$$= \frac{N_0 \pi f_0}{2}$$

The corresponding value of the output signal-to-noise ratio is therefore

$$(\text{SNR})_{\text{out}} = \frac{2A^2}{N_0 \pi f_0} [1 - \exp(-2\pi f_0 T)]$$

Differentiating  $(\text{SNR})_{\text{out}}$  with respect to  $f_0 T$  and setting the result equal to zero, we find that  $(\text{SNR})_{\text{out}}$  attains its maximum value at

$$f_0 = \frac{0.2}{T}$$

The corresponding maximum value of  $(\text{SNR})_{\text{out}}$  is

$$(\text{SNR})_{0,\text{max}} = \frac{2A^2 T}{0.2\pi N_0} [1 - \exp(-0.4\pi)]^2$$
$$= \frac{1.62A^2 T}{N_0}$$

For a perfect matched filter, the output signal-to-noise ratio is

$$(\text{SNR})_{0,\text{matched}} = \frac{2E}{N_0}$$
$$= \frac{2A^2 T}{N_0}$$

Hence, we find that the transmitted energy must be increased by the ratio 2/1.62, that is, by 0.92 dB so that the low-pass RC filter with  $f_0 = 0.2/T$  realizes the same performance as a perfectly matched filter.

### Problem 3

The average probability of error is

$$P_e = p_1 \int_{-\infty}^{\lambda} f_Y(y | 1) dx + p_0 \int_{\lambda}^{\infty} f_Y(y | 0) dx \quad (1)$$

An optimum choice of  $\lambda$  corresponds to minimum  $P_e$ . Differentiating Eq. (1) with respect to  $\lambda$ , we get:

$$\frac{\partial P_e}{\partial \lambda} = p_1 f_Y(\lambda | 1) - p_0 f_Y(\lambda | 0)$$

Setting  $\frac{\partial P_e}{\partial \lambda} = 0$ , we get the following condition for the optimum value of  $\lambda$ :

$$\frac{f_Y(\lambda_{\text{opt}} | 1)}{f_Y(\lambda_{\text{opt}} | 0)} = \frac{P_0}{P_1}$$

which is the desired result.

#### Problem 4

(a) The average probability of error is

$$P_e = \frac{1}{2} \operatorname{erfc} \left( \sqrt{\frac{E_b}{N_0}} \right)$$

where  $E_b = A^2 T_b$ . We may rewrite this formula as

$$P_e = \frac{1}{2} \operatorname{erfc} \left( \sqrt{\frac{A}{\sigma}} \right) \quad (1)$$

where  $A$  is the pulse amplitude at  $\sigma = \sqrt{N_0 T_b}$ . We may view  $\sigma^2$  as playing the role of noise variance at the decision device input. Let

$$u = \frac{\sqrt{E_b}}{\sqrt{N_0}} = \frac{A}{\sigma}$$

We are given that

$$\sigma^2 = 10^{-2} \text{ volts}^2, \quad \sigma = 0.1 \text{ volt}$$

$$P_e = 10^{-8}$$

Since  $P_e$  is quite small, we may approximate it as follows:

$$\operatorname{erfc}(u) \approx \frac{\exp(-u^2)}{\sqrt{\pi}u}$$

We may thus rewrite Eq. 1 as (with  $P_e = 10^{-8}$ )

$$\frac{\exp(-u^2)}{2} \sqrt{\pi}u = 10^{-8}$$

Solving this equation for  $u$ , we get

$$u = 3.97$$

The corresponding value of the pulse amplitude is

$$A = \sigma u = 0.1 \times 3.97 \\ = 0.397 \text{ volts}$$

(b) Let  $\sigma_i^2$  denote the combined variance due to noise and interference; that is

$$\sigma_T^2 = \sigma^2 + \sigma_i^2$$

where  $\sigma^2$  is due to noise and  $\sigma_i^2$  is due to the interference. The new value of the average probability of error is  $10^{-6}$ . Hence

$$10^{-6} = \frac{1}{2} \operatorname{erfc} \left( \frac{A}{\sigma_T} \right) \\ = \frac{1}{2} \operatorname{erfc}(u_T) \quad (2)$$

where

$$u_T = \frac{A}{\sigma_T}$$

Equation (2) may be approximated as (with  $P_e = 10^{-6}$ )

$$\frac{\exp(-u_T^2)}{2\sqrt{\pi}u_T} \approx 10^{-6}$$

Solving for  $u_T$  we get

$$u_T = 3.37$$

The corresponding value of  $\sigma_T^2$  is

$$\sigma_T^2 = \left(\frac{A}{u_T}\right)^2 = \left(\frac{0.397}{3.37}\right)^2 = 0.0138 \text{ volts}^2$$

The variance of the interference is therefore

$$\begin{aligned} \sigma_i^2 &= \sigma_T^2 - \sigma^2 \\ &= 0.0138 - 0.01 \\ &= 0.0038 \text{ volts}^2 \end{aligned}$$

### Problem 5

The bandwidth  $B$  of a raised cosine pulse spectrum is  $2W - f_1$ , where  $W = 1/2T_b$  and  $f_1 = W(1 - \alpha)$ . Thus  $B = W(1 + \alpha)$ . For a data rate of 56 kilobits per second,  $W = 28$  kHz.

- (a) For  $\alpha = 0.25$ ,  
 $B = 28 \text{ kHz} \times 1.25$   
 $= 35 \text{ kHz}$
- (b)  $B = 28 \text{ kHz} \times 1.5$   
 $= 42 \text{ kHz}$
- (c)  $B = 49 \text{ kHz}$
- (d)  $B = 56 \text{ kHz}$

### Problem 6

- (a) For a unity rolloff, raised cosine pulse spectrum, the bandwidth  $B$  equals  $1/T$ , where  $T$  is the pulse length. Therefore,  $T$  in this case is  $1/12$  kHz. Quaternary PAM ensures 2 bits per pulse, so the rate of information is

$$\frac{2 \text{ bits}}{T} = 24 \text{ kilobits per second}$$

- (b) For 128 quantizing levels, 7 bits are required to transmit an amplitude. the additional bit for synchronization makes each code word 8 bits. The signal is transmitted at 24 kilobits/s, so it must be sampled at

$$\frac{24 \text{ bits/s}}{8 \text{ bits/sample}} = 3 \text{ kHz}$$

The maximum possible value for the signal's highest frequency component is 1.5 kHz, in order to avoid aliasing.