Telecommunication Services Engineering Lab




- Week #1
- (January 4 8)
- Current Generation Networks: From 2G to 2.5G
- Week #2
- (January 11-15)
- Value added Services in Current Generation Networks
- Week #3
- (January 18-22)
- Next Generation Network Vision
- Session Signaling and Signaling Protocol Specific Architecture
- Week #4
- (January 25 39)
- Web Services
- Project specification available
- Week #5
- (February 2 6)
- Tools for Value Added Services Engineering (SDS and Web Logic)
- Week #6
- (February 9 13) Quiz1



Chapter II Current Generation Networks: Value Added Services



Outline

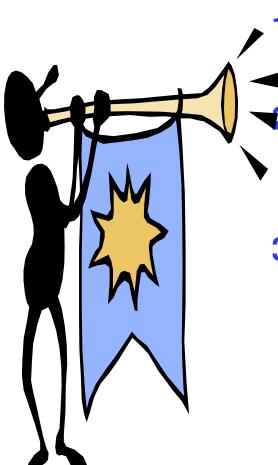


1. Fundamentals of service engineering

Telephony (or session oriented) services engineering

3. Non telephony (or non session oriented) services engineering



Fundamentals

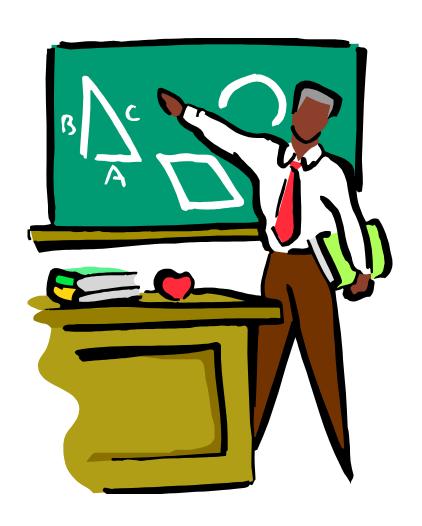

- 1. Services
- 2. Business model
- 3. Service engineering



Services

Basic service offered by circuit switched telephony: Two party voice call

Value added services (or services for short)

Anything that goes beyond two party voice call



Services

- Telephony (or session oriented) services
 - interact will call control
 - Happen before, during or after a call
 - Some examples

Call transfer

Call diversion

Call hold

Call park and pick up

Call waiting

Message waiting indication

Name identification

Call completion

Call offer

Call intrusion



Call transfer

Allow a user A in communication with user B to establish a new call between user B and user C

- First case: User A has a call established with user C before the transfer
- Second case: User A does not establish any call with user C before the transfer

Call diversion

Divert the call (before answering it) if some conditions are met

- Unconditional
- Busy
- No reply



Call hold

Allow a user A to put user B on "hold" after the call has been established

- User B can hear music / advertisement in the meantime

Also allow user A to retrieve a call previously put on hold

Call park and pick up

Generalization of call hold / retrieve

- Parking places (I.e identifier for each parked call)
- Retrieval using identifiers

Roch H. Glitho



Call waiting

Allow a busy user to be notified of an incoming call and to decide how to proceed (Classical example; Internet call waiting)

- Accept (I.e give up on previous call)
- Reject
- Divert

Message waiting indication

Self explanatory

- User can call a message center



Name indication

Self explanatory ...

Call completion

Camp on

- Allow caller to establish a call with a busy callee as soon as callee is free and without having to re-dial callee's number.



Call offer ...

Strong form of call completion

Allow caller to offer a call to a busy callee and wait till busy callee accepts the call ...

Call intrusion

Allow user A to establish a call with a busy user B by breaking into the call between B and C

- Result: 3 party call



Services

- Non Telephony (or non session oriented) services
 - Do not interact at all with call control
 - Some examples
 - » Messaging (SMS)
 - » Internet access from a mobile phone



Services

- Hybrid services
 - Combination of telephony and non telephony services
 - Some examples
 - » Email notification of unsuccessful calls



Business model (Proposed by TINA consortium) Roles

Consumer

- End-user: Actual user of the service
- Subscriber: Entity having the business agreement for service usage

Retailer (or service provider)

- One stop shop
- Entity which provides the services and which has the business agreement with the subscriber
- Can provide own services or services subcontracted from third parties


Third party service provider

- Has business agreement with retailer and no direct business agreement with subscribers
- Communication/connectivity provider: "Pipe" provider
- Broker: Ensure fair information distribution to all parties



Business model (Proposed by TINA consortium)

Business roles / interfaces

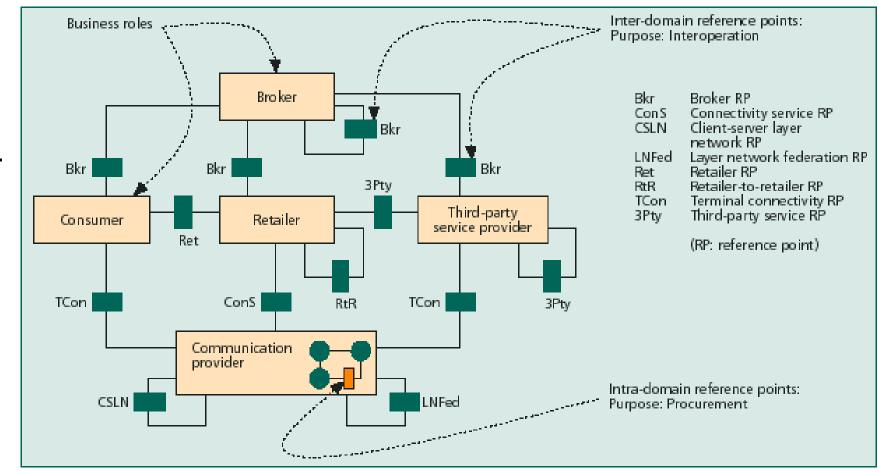

Note: Taken from IEEE Communications Surveys & Tutorials (Reference [x])



Service engineering (or service life cycle)

Four phases

- Creation (also known as construction)
 - Specification, design/coding, and testing
- Deployment
 - Service logic (or executable) resides on specific node(s) and needs to be deployed there
- Usage
 - Subscription/billing, triggering, features interactions
- Withdrawal
 - Removal from network




Service Engineering

Why is it an important discipline?

- Business standpoint
 - High quality two party voice call is now a commodity
 - Value added services are needed to attract subscribers and generate revenues.
- Engineering standpoint
 - It is less than trivial
 - Example: Service creation
 - Secure and selective access to network resources is required
 - Related issues: Level of abstraction, security framework, service creation tools ...etc.



Telephony services engineering

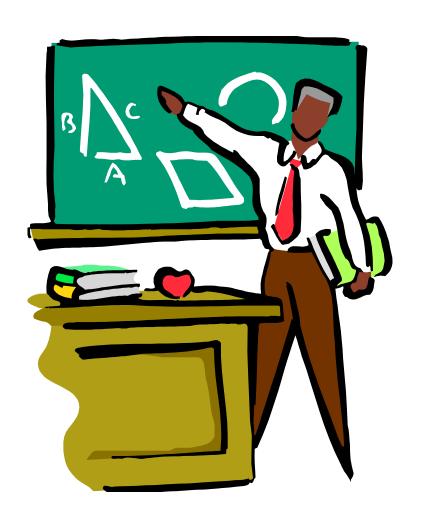

- 1. Supplementary service approach
- 2. Intelligent Network (IN)



Supplementary services approach

Fundamental principles

- Agreement and standardisation of the semantics of each and every supplementary service (i.e. what the service does from the end-user perspective)
- Agreement and standardization of how to enhance the signalling messages for implementing each and every supplementary service
- Enhancement of the software in each and every exchange for the realization of each and every supplementary service




An example of supplementary service engineering

Call diversion on busy

- User A calls user B
- User B is busy
- The call is diverted to user C who replies
- Signalling messages enhanced for its realization in the example
 - ACM (Address completion message)
 - Indication that B is busy
 - Number to which the call should be re-directed.



An example of supplementary service engineering

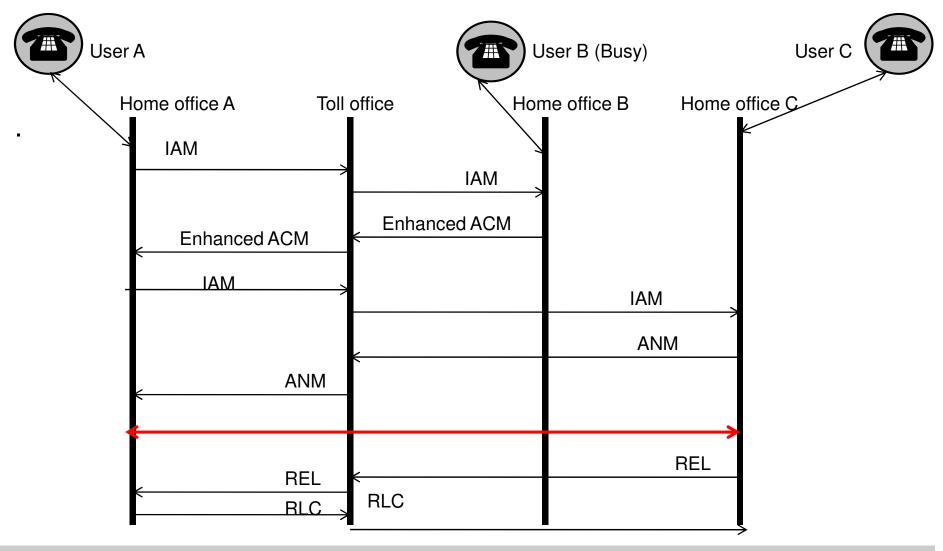



Introduction to IN

The pre-IN era

Service logic embedded in switching software (supplementary service approach)

IN

- Has emerged in the ITU-T based on work done at Telcordia (alias Bellcore), in the late 80s
- Basis for:
 - AIN (North America fixed network)
 - Wireless Intelligent Networks (WIN) (D-AMPS wireless network)
 - Customized Application Mobile Enhanced Logic (GSM wireless network)



IN: Fundamental Principles

1. Separation of switching software and service logic

Main implication: Need for an interaction model between switching and service

- Functional entities / nodes
- Protocols

2. Standardization of capabilities for building services

Main implication: Need for "components" that can be used in various ways for building services



IN: Fundamental Concepts

Call model

Phases for setting up and tearing down calls

- IN call model or basic call process: call model with the possibility to invoke service
 - » Point of invocation
 - » Point of return

Service independent building blocks (SIB)

Components used to build services


- Have a logical start and one or more logical ends
- Are chained to build services

Capabilities set

- A set of potential services
- A given call model
- A set of SIBs
- A set of functional entities
- A protocol



IN: A four planes conceptual architecture

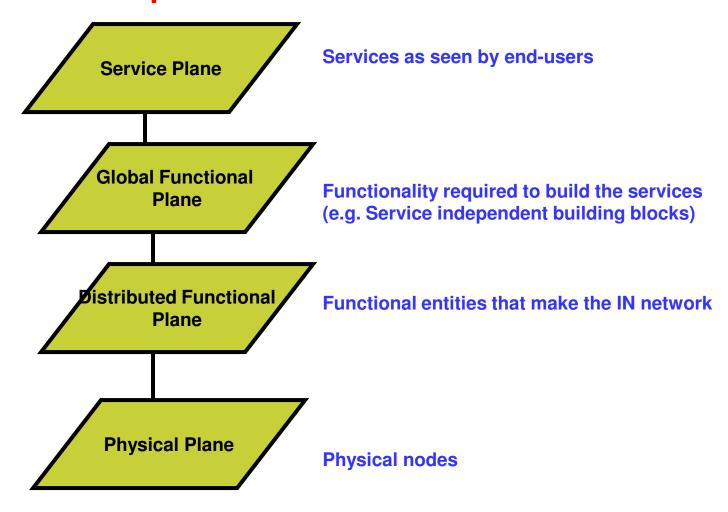



IN: Service Plane

Examples of services made of specific features

Free phone

- One number (800 in North America) feature
- Reverse charging feature

Calling card

- Charging feature
- Originating user prompting



IN: Global Functional Plane

...Simplified Free phone Translate SIB For translating into the Real phone number) **Basic call Process CHARGE SIB** (For reverse charging)




IN: Physical Plane

Functional entities can be grouped in nodes as manufacturers wish

The Intelligent Network Application Protocol (INAP) is used for communications between nodes.

- Request / Reply application level protocol
- Messages transported over SS7
- SS7
 - Overlay packet switched networks
 - Used for outband signalling
 - Made of
 - Message transport part
 - Application part



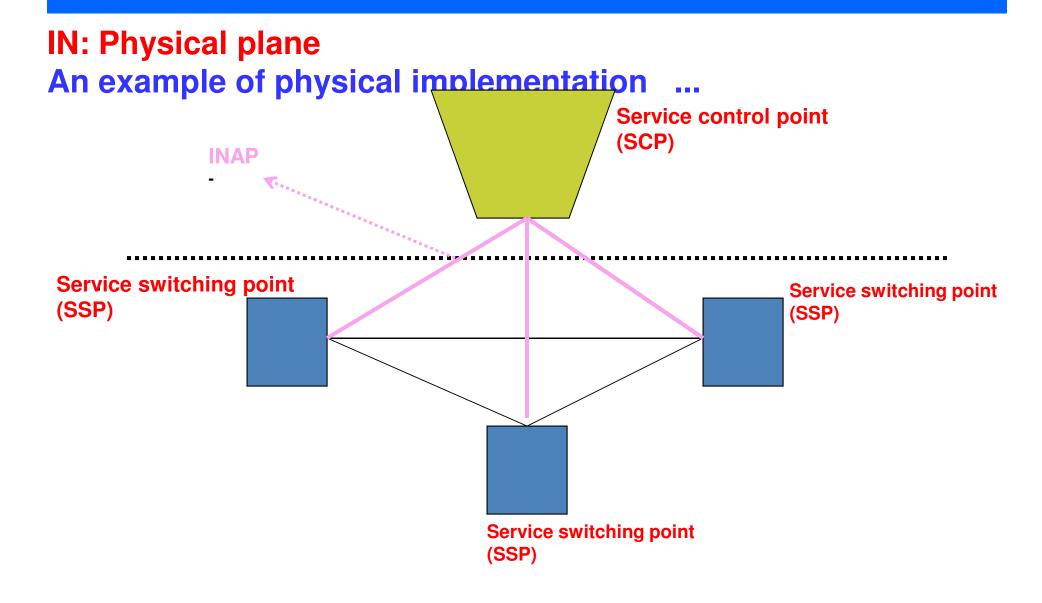



IN: Retrospective

A revolutionary concept


- Separation between service logic and switching software
- Standardisation of service capabilities instead of services

With mixed results

- Reasonable installed basis, but
- Lack of openness
 - Standardised building blocks (e.g. SIBs) did not open telecommunication networks to third parties
 - Components are not interfaces
 - Too many "proprietary" SIBs
- Service creation and deployment remain relatively slow
 - Immaturity of methodologies and tools
 - New service logic in SCPs often required "adjustments" to call model in SSP



Non telephony services engineering

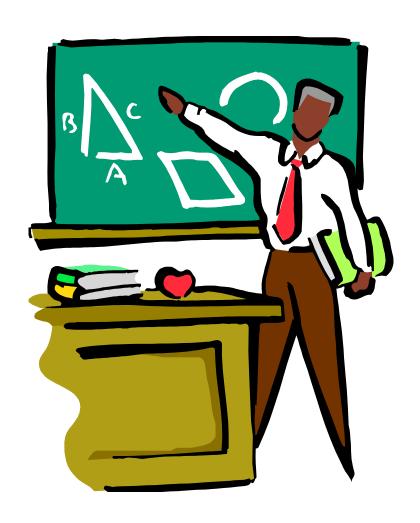

- Short Message Service (SMS)
- 2. WAP for Wireless Internet Access




Most widely used value added service in current generation networks

- Initially (early 90s) engineered to re-use spare capacity in SS7 networks, but now a key revenue generator for operators
 - Consumer applications (e.g. person to person messaging, ring tone downloading, restaurants suggestions based on handset location)
 - Corporate / business applications (e.g. SMS integration with Outlook, bus tracking)
 - Cellular operator applications (remote upgrading of data stored on a SIM card)



Business model

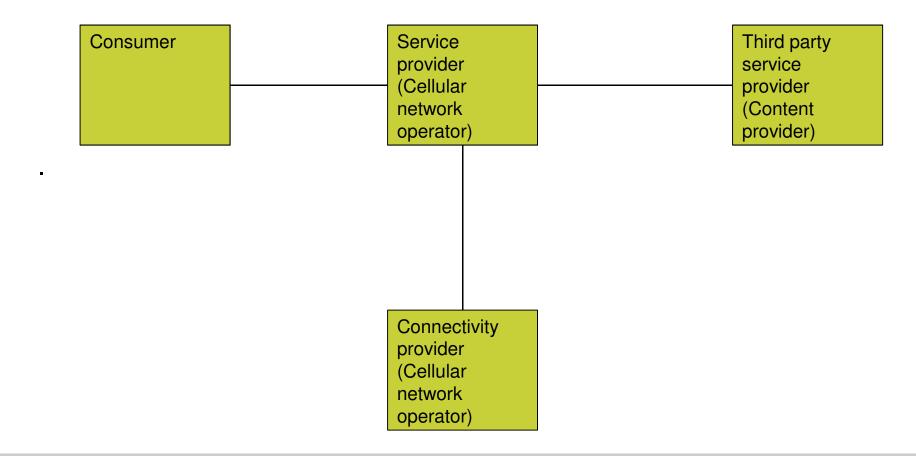



The functional entities

- SMS entity (SME)
 - Internal source or sink of short messages (i.e. within the cellular network)
 - Mobile stations (MS)
 - Reachable via the subscriber number
- External SMS entity (ESME)
 - External source or sink of short messages (i.e. outside the cellular network)
 - Examples: Email/SMS gateway, content provider servers (e.g. list of movies, ringtones. weather)
 - Reachable via a short code
 - Example 466453 (GOOGLE)
 - A wide range of services (e.g. weather, sushi, sports)
 - http://www.google.ca/mobile/sms/index.html




The functional entities

- SMSC
 - SMS switch (Store and forward or forward and forget)
 - Store and forward
 - Resends for some period till message successfully received
 - Forward and forget
 - No retransmission attempt
- SMS-GMSC / SMS IWMSC
 - Interworking between SMSC and MSC
 - May be collocated/integrated with SMSC or MSC
 - Mobile station (MS) originating message
 - Mobile station (MS) terminating message



Functional entities

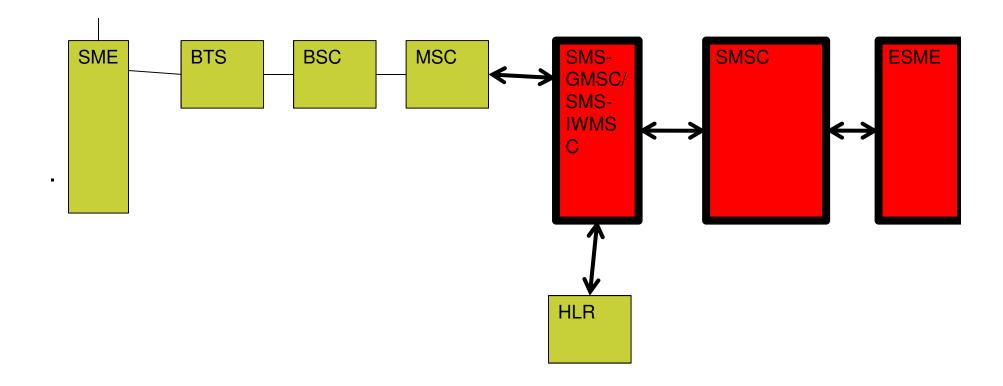



- Short Message Peer to Peer (SMPP) protocol
 - ESME and SMSC
 - SMSC and SMSC (when messages are routed without using the cellular network infrastructure)
 - Internet flavored open and standard application layer protocol
 - runs on top of IP and Internet Transport protocols such as TCP
 - Why?
 - ESMEs are generally external servers that support TCP/IP instead of SS7 stack



- Short Message Peer to Peer (SMPP) protocol Key features
 - Request / reply session based protocol (i.e. need to establish sessions before sending requests)
 - Three types of sessions initiated by ESME
 - Transmitter session (TX)
 - ESME can send messages to SMSC that will send them to mobile stations (i.e. mobile terminated messages)
 - Receiver session (RX)
 - ESME can receive messages from SMSC (i.e. mobile originated messages
 - Transceiver session (TRX)
 - ESME can transmit and receive (i.e both mobile originated and mobile terminated messages)
 - SMSC can also initiate sessions with ESME (i.i outbind session)



- Short Message Peer to Peer (SMPP) protocol
 - The operations
 - Session management
 - Message submission
 - Message delivery
 - Message broadcast
 - Ancillary operations (e.g. enhanced features such as message cancelation, queries, message replacement)




- Short Message Peer to Peer (SMPP) protocol Examples of messages
 - Session management
 - bind transmitter
 - bind_Receiver
 - Bind_transceiver
 - Message submission
 - Submit_sms
 - Message delivery
 - Deliver sms
 - Message broadcast
 - Broadcast_sm
 - Ancillary operations (e.g. enhanced features such as message cancelation, queries, message replacement)
 - Cancel sm



A call case

 Assumption (SMS-GMSC / SMS-IWMSC is collocated with SMSC)

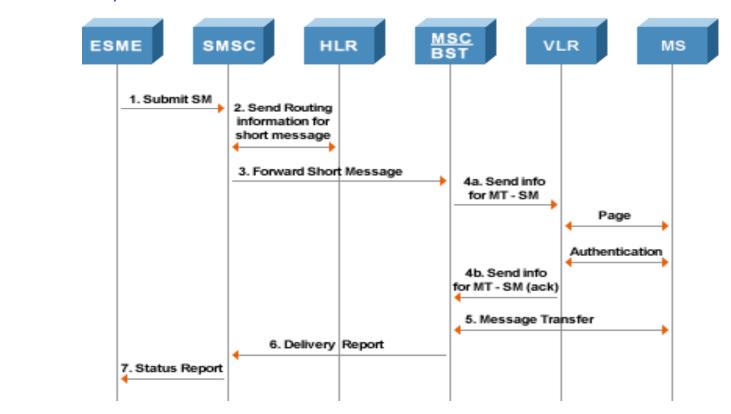



WAP: Introduction

Product of an industry consortium, the WAP forum

- First release 1998 (WAP 1.0)
- Second release 2002 (WAP 2.0)
- Now transferred to the the Open Mobile Alliance (OMA)

Main objective: bring non telephony services to wireless users ...

- Web browsing
- Email

Raison d'etre

- Limitations of cellular phones (Power, memory, battery)
- Limitations of today's wireless networks (Scarce bandwidth, unreliable links)



WAP: Fundamental principles

Optimal usage of "scarce" air interface resources

- Implications
 - Less bandwidth hungry protocols
 - binary encoding instead of text encoding

Optimal usage of "limited" terminal capabilities

- Implications
 - New description language(s)
 - New browser(s)

Independence of underlying bearer (e.g. GSM, TDMA, PDC)



Fundamental concepts

WAP Micro browser

- Browser adapted to limited terminal capabilities

WAP proxy/gateway


- Gateway between the Internet and operator's domain
 - Protocol gateway
 - Content adaptation
 - New description language(s)
 - New browser(s)

Application framework

- Application development / execution environment
 - APIs
 - Mark ups
 - Scripting




WAP: Basic Architecture Protocol stacks (Legacy WAP 1.x stack + WAP 2.0 Internet protocol stack) ...

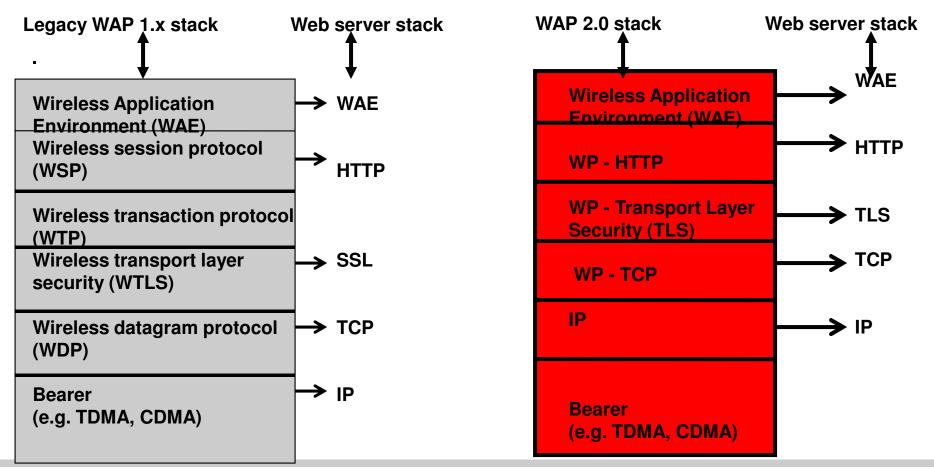



WAP: Basic Architecture

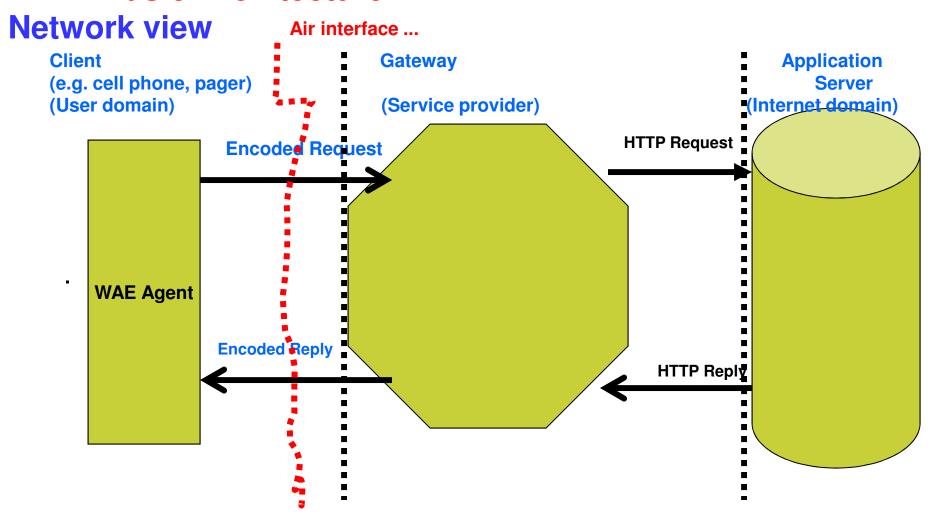



WAP: Beyond Internet wireless access ...

Push

- Information pushed to wireless device instead of the classical Internet pull model
 - Notifications (e.g. voice messages waiting to be retrieved)
 - News, traffic information

Wireless Telephony Applications


- Enhancements to call control services
 - Call initiation using an electronic agenda
 - On-line selection of how to handle a call (accept, reject, forward)

Multimedia messaging

- Interface between the client and the messaging server




WAP: Simplified Push

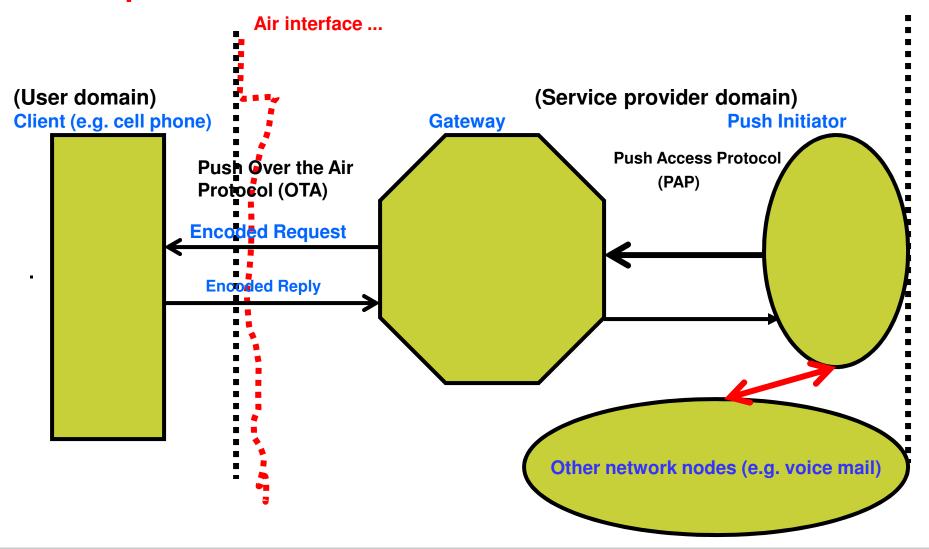



WAP: Simplified WTA

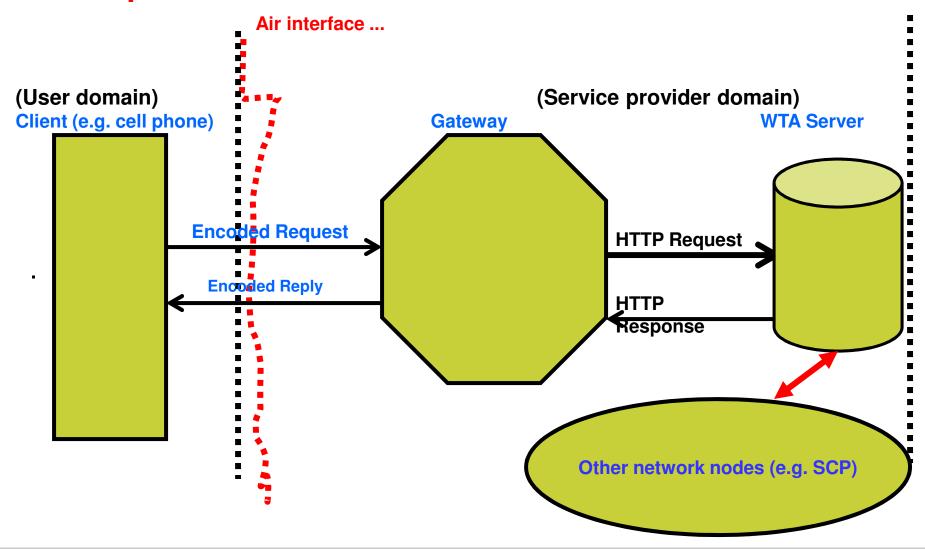



To probe further ...

On business model

H. Berndt, T. Hamada, and, P. Graubmann TINA: Its Achievements and its Future Directions, IEEE Communication & Surveys, 1Q 2000,

On intelligent networks

R. Glitho and Th. Magedanz, guest editors, Intelligent Networks in the new Millennium, IEEE Communications Magazine, June 2000 Vol.38 No6

On SMS

- G. Peersman and S. Cvetkovic, The Global System for Mobile Communications Short Message Service, IEEE Personal Communications, June 2000
- J. Brwon, B. Shipman and R. Vetter, SMS: The Short Message Service, IEEE Computer, December 2007

SMPP v.5:http://www.hslsms.com/documents/SMPPV5.pdf

On WAP

WAP 2.0 Technical white paper, http://www.wapforum.org