



Outline


- ✓ Phase diagram with intermediate phases
 - solid solutions
 - compounds
- ✓ **Fe-Fe₃C phase diagram**
- ✓ Classifications of Fe-C alloys
- ✓ Microstructure of Fe-C alloys




Phase Diagrams with Intermediate Phases

- Eutectic systems that we have studied so far have only two solid phases (α and β) that exist near the ends of phase diagrams. These phases are called **solid solutions**.
- Some binary alloy systems have **solid solution** phases (*see next slide*). In phase diagrams, these phases are separated from the composition extremes (0% and 100%).

- α and β are the terminal solid solutions
- Mg_2Pb is an intermetallic compound
 - ratio (2:1) (Mg:Pb)
 - 67 mol% Mg and 33 mol% Pb
 - 19 wt% Mg and 81 wt% Pb
- melts at a fixed temperature M
- Intermetallic compounds are very common in metal alloy systems.

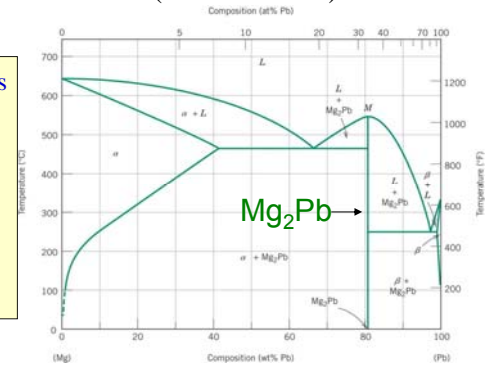


Cu-Zn Phase Diagram

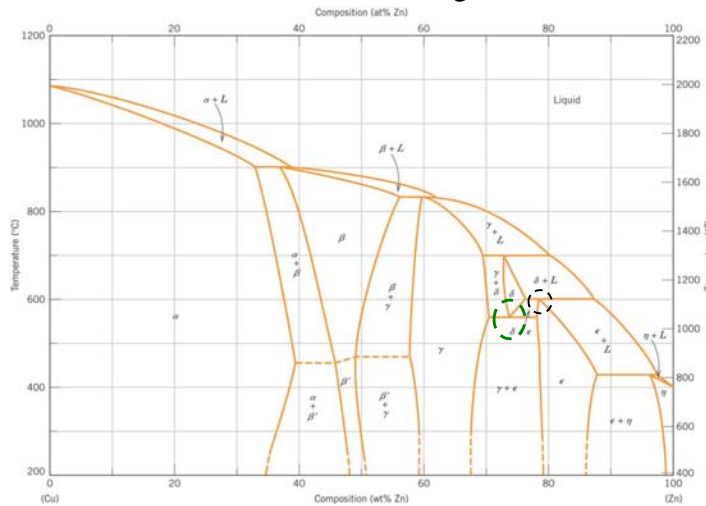

- α and η are terminal solid solutions
- β , β' , γ , δ and ϵ are intermediate solid solutions.
- new phenomena exist: - reaction — reaction



Cu-Zn Phase Diagram Eutectoid and Peritectic Reactions

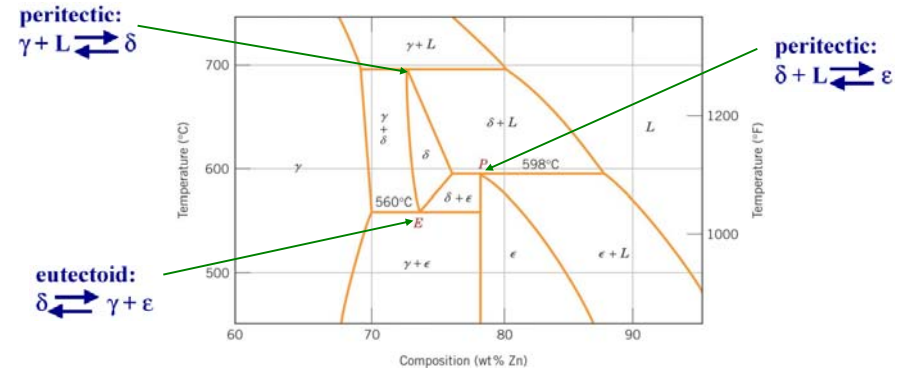


- **Eutectoid:** one solid phase transforms into two other solid phases upon cooling
- **Peritectic:** one solid and one liquid phase transform into another solid phase upon cooling



Eutectoid Reactions

The **eutectoid** (*eutectic-like* in Greek) reaction is similar to the eutectic reaction but occurs from one solid phase to two new solid phases.

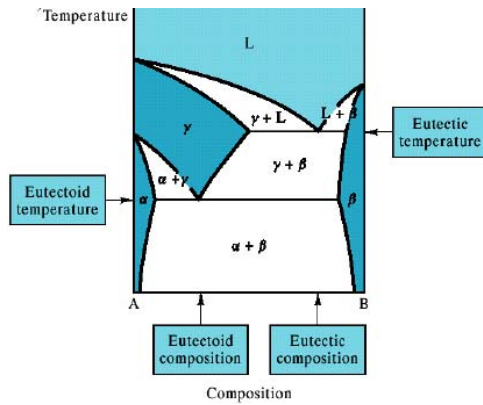


The above phase diagram contains both an **eutectic** reaction and (its solid-state analog) an **eutectoid** reaction



The Iron-Iron Carbide (Fe-Fe₃C) Phase Diagram

In their simplest form, steels are alloys of Iron (Fe) and Carbon (C). The Fe-C phase diagram is a fairly complex one, but we will only consider the part up to around 7% carbon of the diagram.

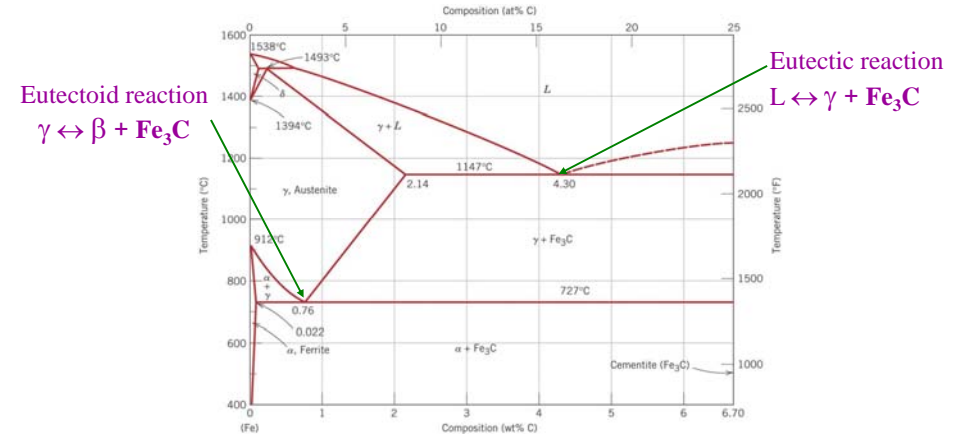

912°C 1394°C 1538°C
 α (BCC) \leftrightarrow γ (FCC) \leftrightarrow δ (BCC) \leftrightarrow liquid



Phases in Fe-Fe₃C Phase Diagram

α -ferrite - solid solution of C in Fe

- Stable form of iron at room temperature.
- The maximum solubility of C is 0.022 wt% (**interstitial solubility**)
- Soft and relatively easy to deform

γ -austenite - solid solution of C in Fe

- The maximum solubility of C is 2.14 wt % at 1147°C.
- Interstitial lattice positions are much larger than ferrite (**higher C%**)
- Is not stable below the eutectoid temperature (727 °C) unless cooled rapidly (*Chapter 10*).

δ -ferrite solid solution of C in Fe

- The same structure as α -ferrite
- Stable only at high T, above 1394 °C
- Also has low solubility for carbon (BCC)

Fe₃C (iron carbide or cementite)


- This intermetallic compound is metastable, it remains as a compound indefinitely at room T, but decomposes (very slowly, within several years) into α -Fe and C (graphite) at 650 - 700 °C

Fe-C liquid solution



Classifications of Fe-C alloys

- < 0.008 wt% Carbon →
 - α -ferrite at room T
- 0.008 – 2.14 wt% C →
 - usually < 1 wt %
 - α -ferrite + Fe₃C at room T
- 2.14 – 6.7 wt% C →
 - usually < 4.5 wt %

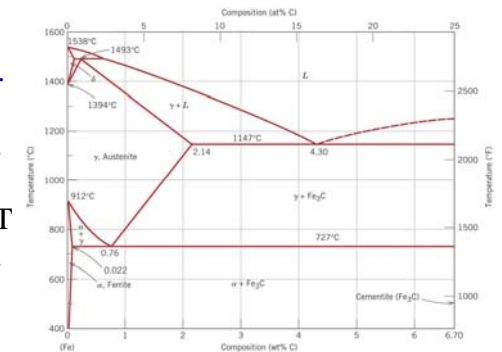

➤ **Magnetic properties:** α -ferrite is magnetic (below 768 °C), austenite is non-magnetic.

➤ **Mechanical properties:** Cementite is very **hard** and **brittle** thus it can strengthen steels.

➤ Mechanical properties also depend on, that is, how ferrite and cementite are mixed.




Development of Microstructure in Iron - Carbon alloys

- Microstructure depends on composition (carbon content) and heat treatment.
- In the discussion below we consider slow cooling in which equilibrium is maintained.


Eutectoid steel

When alloy of eutectoid composition (0.76 wt % C) is cooled slowly it forms a lamellar structure of α and cementite (Fe_3C). This structure is called **pearlite**.


Mechanically, pearlite has properties intermediate to soft, ductile ferrite and hard, brittle cementite.

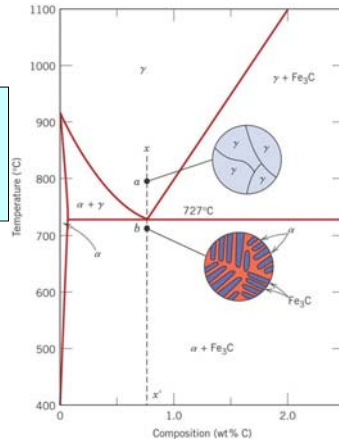

Development of Microstructure in Iron - Carbon alloys

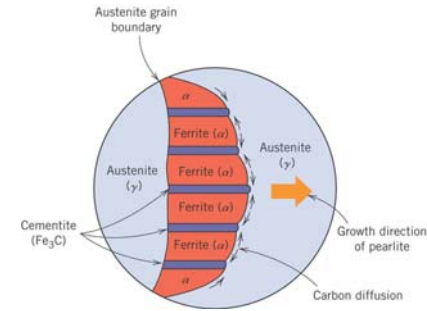

The layers of alternating phases in pearlite are formed for the same reason as layered structure of eutectic phases: redistribution C atoms between ferrite (0.022 wt%) and cementite (6.7 wt%) by atomic diffusion.

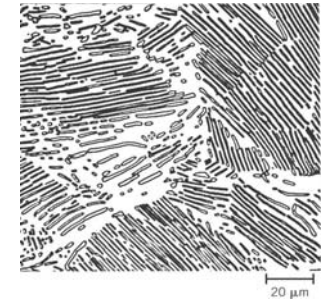


the dark areas are Fe_3C layers, the light phase is α -ferrite




Microstructure of hypoeutectoid steel

Compositions to the left of eutectoid (0.022-0.76 wt % C) **hypoeutectoid** alloys
- less than eutectoid (Greek)

Hypoeutectoid alloys contain **proeutectoid ferrite** (formed above the eutectoid temperature) plus the **eutectoid pearlite** that contain **eutectoid ferrite** and **cementite**.


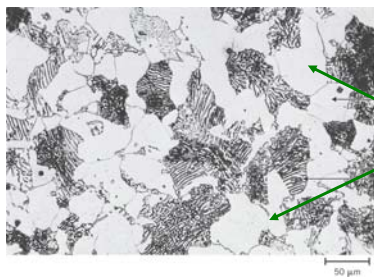


Proeutectoid α

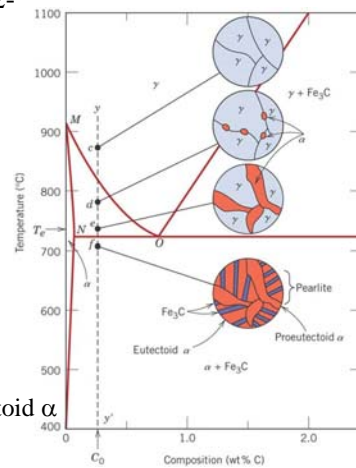

Microstructure of hypereutectoid steel


Compositions to the right of eutectoid (0.76-2.14 wt % C) **hypereutectoid** alloys.
- more than eutectoid (Greek)

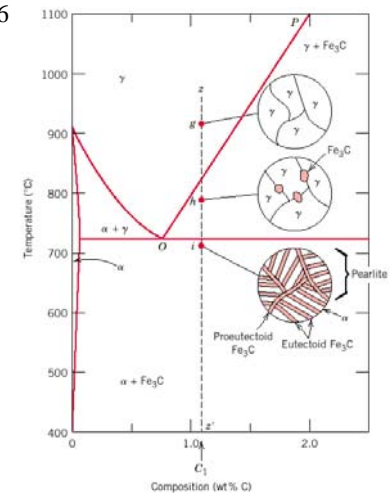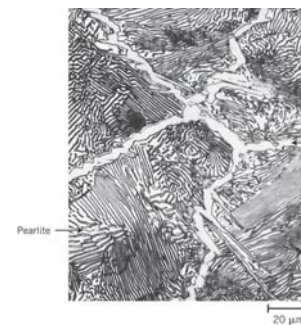




Example 1

Compute the mass fractions of proeutectoid ferrite and pearlite that form in an Fe – C alloy containing 0.25 wt% C, at a temperature just below the eutectoid.

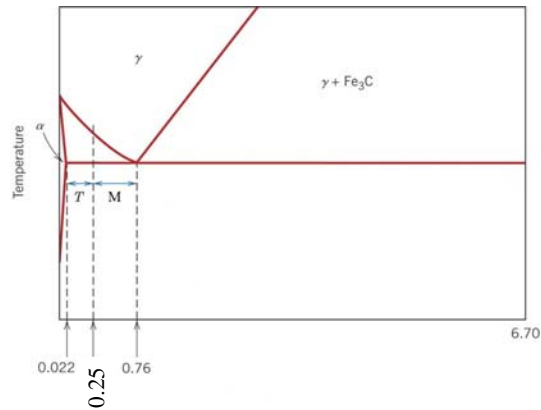

Example 2

Compute the mass fractions of total ferrite and cementite that form in an Fe – C alloy containing 0.25 wt% C at a temperature just below the eutectoid.

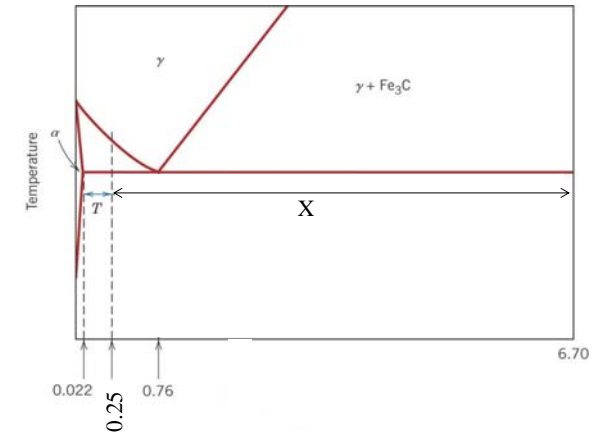

Finally, determine the fraction of eutectoid ferrite?



Next topic:
Midterm Exam