
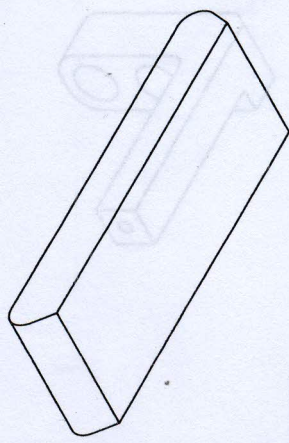
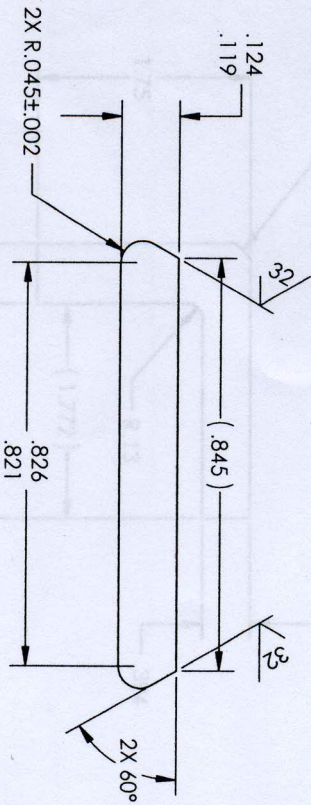


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BARBOUR STOCKWELL AND SHALL NOT BE REPRODUCED IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF BARBOUR STOCKWELL, INC. © 1999/2012

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
01			8/11/2011	
			2/17/2012	

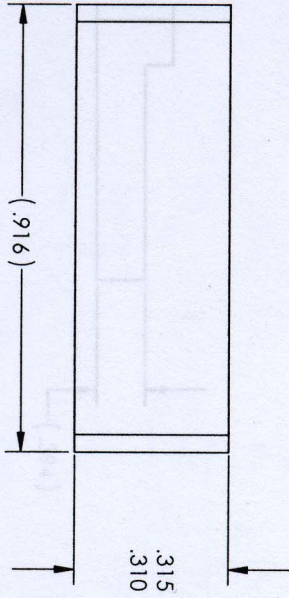

Material	RPM	Max Speed
Ti 6/4 (annealed)	14500	m/s 366
17-4 PH H1150 condition	14500	366
15-5 PH H1150 condition	14500	366
Stellite 6	14500	366
In 718	14500	366

THIRD ANGLE PROJECTION 		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMAL ANGLES FRACTIONS DECIMAL ANGLES .XXX ± .005 .XXX ± .005 .XXX ± .005 .XXX ± .005	
MATERIAL: SEE TABLE FINISH: 125 RMS HARDNESS: NONE		CAD GENERATED DRAWING DO NOT MANUALLY EDIT APPROVALS: DATE: 8-9-11 DRAWN: TL CHECKED: KM MFG ENG: Product Eng QUAL ENG:	
BARBOUR STOCKWELL INCORPORATED FLAT SAMPLE		DWG NO: 12295-02 12295-02 - Flat Sample SHEET OF 1	

- NOTES:**
- BREAK ALL SHARP EDGES R0.02 MAX.
 - MAX CORNER RADIUS 0.01 UNLESS OTHERWISE NOTED
 - DEBURR ALL DRILLED AND TAPPED HOLES ϕ 1/32 OVERSIZE
 - ALL DIAMETERS TO BE CONCENTRIC WITHIN 0.005.

